


TYPE GP

GROUND CONNECTOR

For Two Copper Cables to Rod or Pipe

High copper alloy ground connector for joining a range of parallel cables perpendicular to rod, pipe or column. Also used with one groove for run, the other for tap to equipment. High copper alloy cast body and DURIMUM™ U-bolts, nuts, and lockwashers make the GP suitable for direct burial in the ground or concrete. One-wrench installation. UL467 Listed. Acceptable for direct burial in earth or concrete.

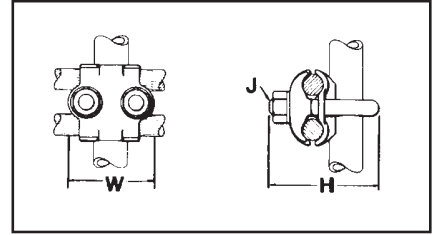

Catalog Number	Conductor			H	J	W
	Tube I.P.S.	Rod Size or O.D. Range	Cable			
GP114C	1/4	1/2	8 Sol. - 4 Str.	2-1/2	3/8	1-7/8
GP1126			4 Sol. - 2/0 Str.			
GP1129			2/0 Sol. - 250			
GP644C	3/8	5/8 - 3/4	8 Sol. - 4 Str.	2-7/8	1/2	2-1/8
GP6426			4 Sol. - 2/0 Str.			
GP6429			2/0 Sol. - 250			
GP6434	1/2 - 3/4	7/8 - 1	300 - 500	3-1/2	38	2-1/2
GP144C			8 Sol. - 4 Str.	2-3/4	3	2-3/8
GP1426			4 Sol. - 2/0 Str.	3		
GP1429	2 Sol. - 250	3				
GP1434	1-1/4	1-5/8	300 - 500	3-3/4	1/2	2-3/4
GP164C			8 Sol. - 4 Str.	3-1/2	3/8	3
GP1629			2 Sol. - 250	3-1/2		
GP1726	4 Sol. - 2 Str.	4				
GP184C	2	2-3/8	8 Sol. - 4 Str.	4-1/8	3/8	3-11/16
GP1826			4 Sol. - 2/0 Str.	4-3/8		
GP2026	3	3-1/2	4 Sol. - 2/0 Str.	5-1/2		4-13/16
GP2226	4	4-1/2	4 Sol. - 2/0 Str.	6-3/8		5-13/16

D-32




TYPE GK

GROUND CONNECTOR

For Three Copper Cables to Rod or Pipe

High copper alloy ground connector for joining three equal cables to rod or tube. Cable grooves take a wide range of cable. High copper alloy cast body and DURIMUM™ U-bolts, nuts, and lockwashers make the GK suitable for direct burial in soil or concrete. One-wrench installation. UL467 Listed. Acceptable for direct burial in earth or concrete.

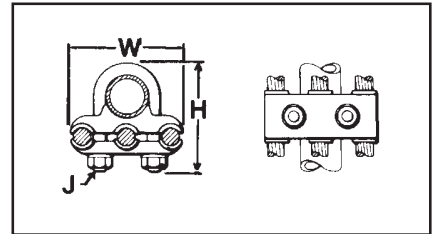

Catalog Number	Conductor			H	J	W
	Tube I.P.S.	Rod Size or O.D. Range	Cable			
GK114C	1/4	1/2	8 Sol. - 4 Str.	2-1/2	3/8	2-1/2
GK1126			4 Sol. - 2/0 Str.			
GK1129			2/0 Sol. - 250			
GK644C	3/8	5/8 - 3/4	8 Sol. - 4 Str.	2-7/8	3/8	2-5/8
GK6426			4 Sol. - 2/0 Str.			
GK6429			2/0 Sol. - 250			
GK6434	1/2 - 3/4	7/8 - 1	300 - 500	3-1/2	1/2	4
GK1426			4 Sol. - 2/0 Str.	2-3/4	38	3-1/4
GK1429			2 Sol. - 250	3-3/4	1/2	3-7/8
GK1434	1	1-1/8 - 1-1/4	300 - 500	3-3/4	1/2	4-3/8
GK1526			4 Sol. - 2/0 Str.	3-3/8	3/8	3-1/2
GK1529			2/0 Sol. - 250	3-3/4	1/2	4-1/8
GK1626	1-1/4	1-3/8 - 1-1/2	4 Sol. - 2/0 Str.	3-1/2	3/8	3-7/8
GK1629			2/0 Sol. - 250	4-1/4	1/2	4-1/2
GK1726	1-1/2	1-5/8 - 1-7/8	4 Sol. - 2/0 Str.	4	3/8	4-1/8
GK1729			2/0 Sol. - 250	4-5/8	1/2	4-3/4
GK1826	2	2 - 2-3/8	4 Sol. - 2/0 Str.	4-1/4	3/8	4-5/8
GK1829			2/0 Sol. - 250	4-3/8	1/2	5-1/8
GK1926	2-1/2	2-1/2 - 2-7/8	4 Sol. - 2/0 Str.	5	3/8	5-1/8
GK1929			2/0 Sol. - 250	5	1/2	5-5/8

