


# Camsco®

**DIGITAL  
MULTI METER &  
CLAMP METER**



**CAMSCO ELECTRIC CO., LTD**

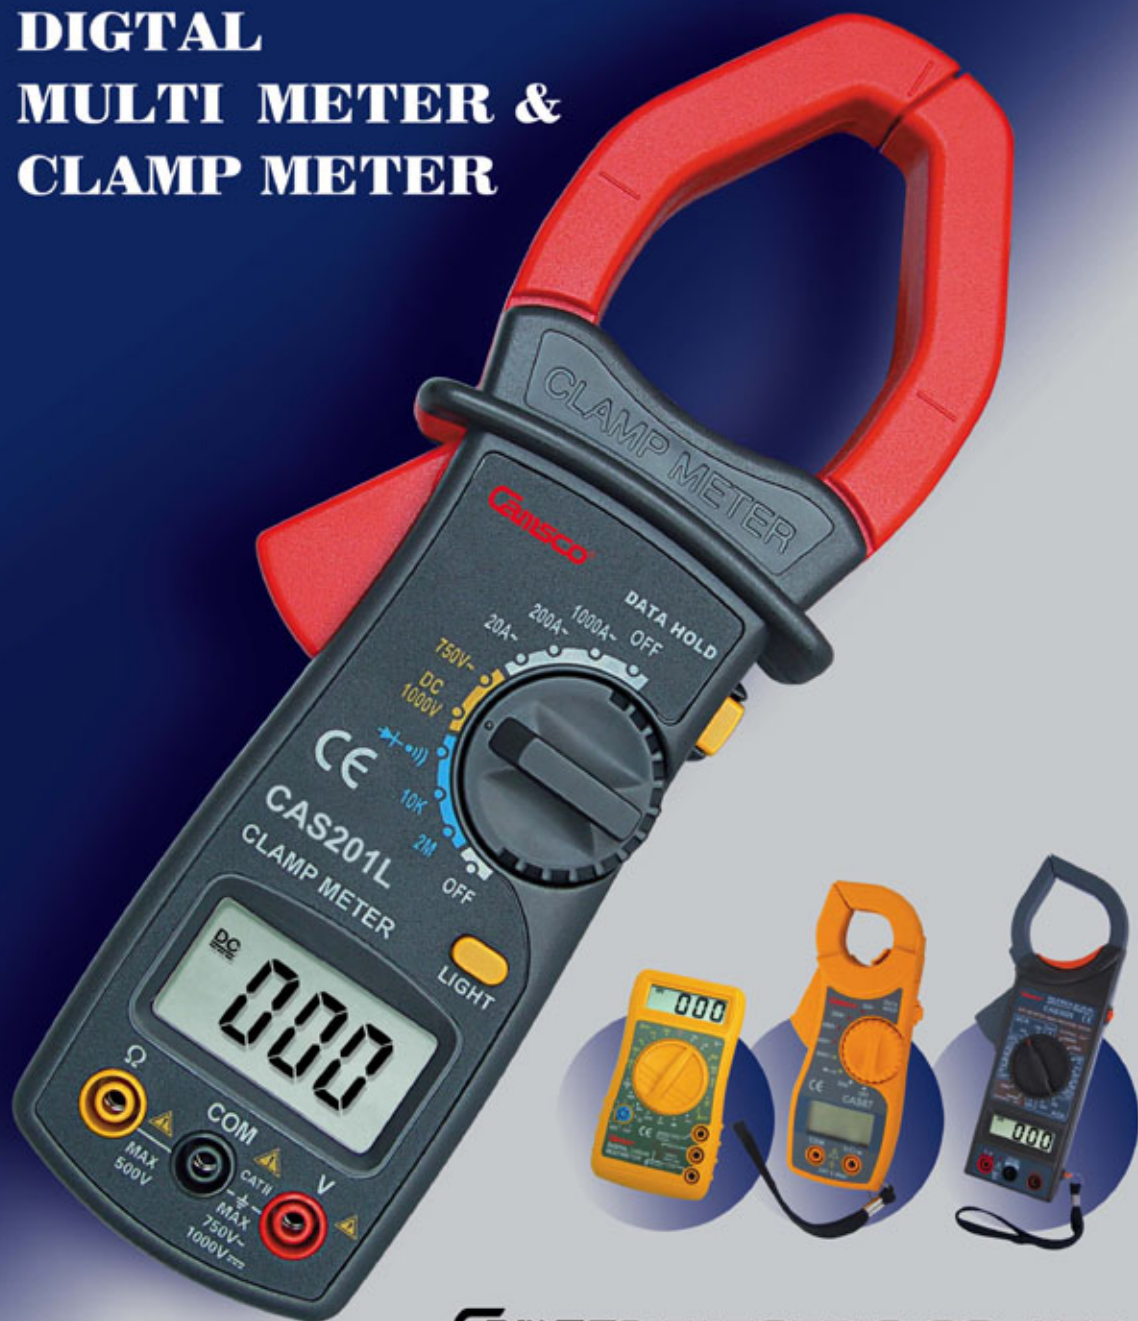

## CAS820B

- 3 1/2 digits LCD with a Max. reading of 1999
- Low battery indication
- Overload protection

Accessories:

Test Lead, Battery(6F22(9V)x1),  
Instruction Manual

### ■ Specifications

Function	Measuring Range	Accuracy
DCV	200m-2000m-20-200-1000V	± 0.8%
ACV	200-750V	± 1.5%
DCA	200 $\mu$ -2000 $\mu$ -20m-200mA-10A	± 1.2%
OHM	200-2000-20K-200K-2000K $\Omega$	± 1.0%
Diode Check	3V/0.8mA	
hFE	Vce 3V, Ib 10 $\mu$ A	
Size / weight	128x70x28mm / 137g	



## CAS201L

- 3 1/2 digits LCD with a Max. reading of 1999
- Three functions in one unit: ACV, ACA & OHM
- Resistance range provides audible continuity test
- Data-hold function

Accessories:

Test Lead, Battery(6F22(9V)x1),  
Instruction Manual, Carrying Case

### ■ Specifications

Function	Measuring Range	Accuracy
DCV	1000V	± 0.8%
ACV	750V	± 1.0%
ACA	20A 200A 1000A	± 2.0%
OHM	10K $\Omega$ 2M $\Omega$	± 1.0%
	20M $\Omega$ 2000M $\Omega$ (with 261)	± 4.0%
Size / weight	288x72x42mm / 410g	



## CAS87

- 3 1/2 digits LCD with a Max. reading of 1999
- Low battery indication
- Data-hold function
- Audible continuity
- Overload protection

Accessories:

Test Lead, Battery(AAA(1.5V)x2),  
Instruction Manual, Carrying Case

### ■ Specifications

Function	Measuring Range	Accuracy
DCV	600V	± 0.8%
ACV	750V	± 1.0%
ACA	200A 400A	± 2.0%
OHM	200K	± 1.0%
Diode Check	3.2V/1.2mA	
Size / weight	150x63x28mm / 150g	



## CAS3020

- 3 1/2 digits LCD with a Max. reading of 1999
- Data-hold function
- Low battery indication
- Audible continuity
- Plug-in insulation tester adapter 500VDC (optional)

Accessories:

Test Lead, Battery(6F22(9V)x1),  
Instruction Manual Carrying Case

### ■ Specifications

Function	Measuring Range	Accuracy
DCV	1000V	± 0.8%
ACV	750V	± 1.2%
ACA	200A 1000A	± 2.5%
OHM	200 $\Omega$ 20K $\Omega$	± 1.0%
	20M $\Omega$ 2000M $\Omega$ (with 261)	± 4.0%
Size / weight	230x70x37mm / 310g	

