

ADAPTOR

Application


Flameproof (Ex 'd') & Increased Safety (Ex 'e')

Connection between cable entry devices and equipment having dis-similar threads.

Male, Female threads : Metric, NPT

Materials : Brass / Brass with Nickel plated / Stainless Steel 316


Certificate No : Baseefa08 ATEX 0019X / IECEx BAS08.0008X.

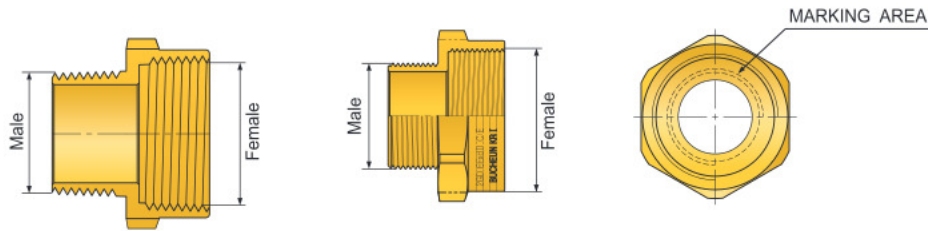

		Female Thread																			METRIC "E"					
		METRIC										NPT														
		M16	M20	M25	M32	M40	M50	M63	M75	M80	M90	M100	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 3/4"	4"				
Male Thread	METRIC	M16	☒	☒	☒									☒	☒										9	
		M20		☒	☒	☒									☒	☒	☒									
		M25			☒	☒	☒									☒	☒									
		M32				☒	☒	☒									☒	☒								
		M40					☒	☒	☒								☒	☒	☒							
		M50						☒	☒	☒								☒	☒	☒						
		M63								☒	☒	☒							☒	☒	☒					
		M75									☒	☒	☒								☒	☒	☒	☒		
		M80										☒	☒									☒	☒	☒		
		M90											☒										☒	☒		☒
M100												☒										☒	☒			
Male Thread	NPT	1/2"		☒	☒	☒									☒	☒									10	
		3/4"			☒	☒	☒									☒	☒									
		1"				☒	☒	☒									☒	☒								
		1 1/4"					☒	☒	☒									☒	☒							
		1 1/2"						☒	☒	☒									☒	☒						
		2"								☒	☒	☒	☒							☒	☒					
		2 1/2"									☒	☒	☒	☒							☒	☒	☒			
		3"										☒	☒	☒									☒	☒		
		3 1/2"												☒										☒		
		4"																						☒		

How to order

DAAD - M20 x N3/4"



2GD Ex db C Ex eb C Extb C IP66 Baseefa08ATEX0019X IECEx BAS08.0008X
DARE-NxxMxx xx(M)x xx(F) 2011/03 DONG-A Bucheon KR CE1180