


REDUCER

Application

- Flameproof (Ex 'd') & Increased Safety (Ex 'e')
- Connection between cable entry devices and equipment having dis-similar threads.
- Male, Female threads : Metric, NPT
- Materials : Brass / Brass with Nickel plated / Stainless Steel 316
- Certificate No : Baseefa08 ATEX 0019X / IECEx BAS08.0008X

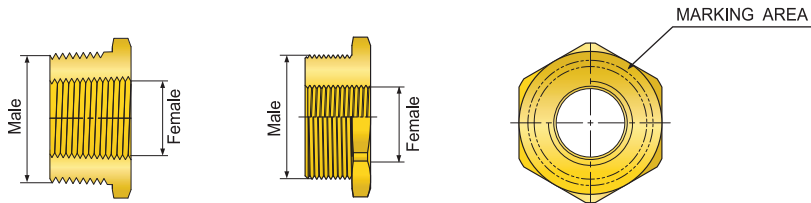

**ATEX
IECEx
KOSHA**



		Female Thread																							
		METRIC										NPT													
Male Thread	METRIC	M16	M20	M25	M32	M40	M50	M63	M75	M80	M90	M100	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"			
		M16																							
		M20	⊗																						
		M25	⊗	⊗										⊗											
		M32	⊗	⊗	⊗									⊗	⊗										
		M40	⊗	⊗	⊗	⊗								⊗	⊗	⊗									
		M50	⊗	⊗	⊗	⊗	⊗							⊗	⊗	⊗	⊗								
		M63	⊗	⊗	⊗	⊗	⊗	⊗						⊗	⊗	⊗	⊗	⊗							
		M75	⊗	⊗	⊗	⊗	⊗	⊗	⊗					⊗	⊗	⊗	⊗	⊗	⊗						
		M80	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗				⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗				
	M90	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗				
	M100	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗		⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗			
NPT	1/2"	⊗																							
	3/4"	⊗	⊗										⊗												
	1"	⊗	⊗	⊗									⊗	⊗											
	1 1/4"	⊗	⊗	⊗	⊗								⊗	⊗	⊗										
	1 1/2"	⊗	⊗	⊗	⊗	⊗							⊗	⊗	⊗	⊗									
	2"	⊗	⊗	⊗	⊗	⊗	⊗						⊗	⊗	⊗	⊗	⊗								
	2 1/2"	⊗	⊗	⊗	⊗	⊗	⊗	⊗					⊗	⊗	⊗	⊗	⊗	⊗							
	3"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗				⊗	⊗	⊗	⊗	⊗	⊗	⊗						
	3 1/2"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗					
	4"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗		⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗				



II 2GD Ex d II C Ex e II Ex tD A21 IP66/IP67 (-60 °C ≤ ta ≤ +100 °C)