

# Malleable Iron Threaded Conduit Bodies

## For Threaded Rigid Conduit and IMC

**Application:**

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

**Features:**


- Tapered threaded hubs (NPT)
- Flat back design for easy mounting close to walls
- Suitable for use in concrete

**Standard Materials:**

Malleable Iron

**Standard Finish:**

Zinc Plated and Aluminum Enameled



**Optional Finish:**

For additional corrosion protection, specify Hot Dip Galvanized.


Add suffix "G" to Malleable Iron Catalog Number.

**Example:** T1G

Please call factory for pricing and availability.



Type T1

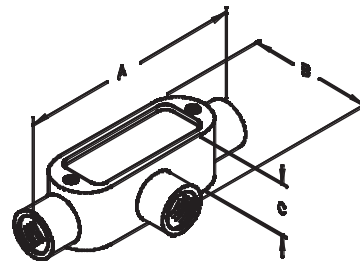

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAXIMUM WIRE SIZE	VOL. CU. IN.	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994	UPC/DCI #
<b>T TYPE</b>											
T1	1/2"	5.375	2.063	1.313	N/A	6.00	10	50	111	44011	
T2	3/4"	6.000	2.250	1.500	3 #6 AWG	9.50	10	50	137	44021	
T3	1"	7.063	2.625	1.813	3 #4 AWG	15.00	5	25	195	44031	
T4	1-1/4"	9.000	2.750	2.625	3 #2 AWG	33.00	-	10	332	44041	
T5	1-1/2"	9.000	3.500	2.625	3 #2 AWG	36.00	-	10	368	44051	
T6	2"	11.500	4.125	3.125	3 #1/0 AWG	75.00	-	5	663	44061	
T7	2-1/2"	15.000	5.688	4.313	3 #4/0 AWG	138.00	-	1	1271	44071	
T8	3"	15.125	5.875	4.313	3 #4/0 AWG	170.00	-	1	1547	44081	
T9	3-1/2"	18.125	6.813	4.875	3 #350 MCM	300.00	-	1	2542	44091	
T10	4"	18.125	7.188	4.875	3 #350 MCM	328.00	-	1	2542	44101	