



A good combination of strenght, mechanical protection and flexibility

## Liquid - Tight Flexible Metal Conduit - UL 360


### The Product - High grade liquid - tight flexible conduit

- Hot -dipped galvanized steel strip with copper ground wire.
- Extra Water - proof and oil resistant.
- High tension and flexibility.
- Heavy duty PVC jacket in grey and black color.

### Application

Seals Out abrasives, alcohol, fumes, gases, dirt, oils, water and spray suitable fot the following potentials :

- Direct burial
- Machine tools
- Silo and plant
- Food manufacturing and process equipment
- High rise buildings
- Water treatment, Sewage equipment
- Security

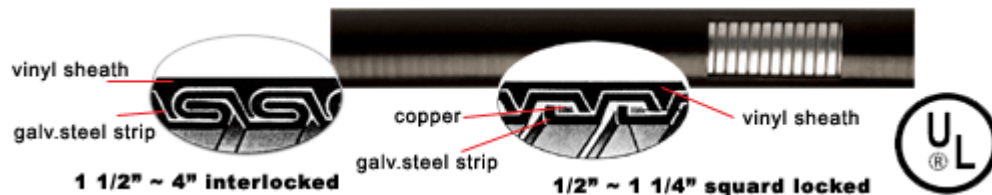

Nominal Size	Diameter		Vinyl Sheath	Min. Bending	Length of Each Roll
	Inside Diameter	Outside Diameter			

	min. mn.	max. mm.	min. mn.	max. mm.	Thickness mm.	Radius mm.	ft.	m.
1/2"	15.80	16.31	20.80	21.30	0.76	160	200	60
3/4"	20.83	21.34	25.20	26.70	0.89	200	100	30
1"	26.44	27.08	32.80	33.40	0.89	330	100	30
1-1/4"	35.05	35.81	41.40	42.20	0.89	400	50	15
1-1/2"	40.10	40.64	47.40	48.30	1.02	450	50	15
2"	51.31	51.94	59.40	60.30	1.02	560	50	15
2-1/2"	62.99	63.63	72.10	73.00	1.27	700	25	7.5
3"	77.98	78.74	87.90	88.90	1.27	800	25	7.5
4"	101.60	102.62	113.30	114.30	1.52	1200	25	7.5