




# TUBULAR CABLE LUGS FOR ALUMINIUM CONDUCTORS

Light Duty

Material : E-Copper-BS :1977

Surface : Tin Plated (With or Without inspection hole)

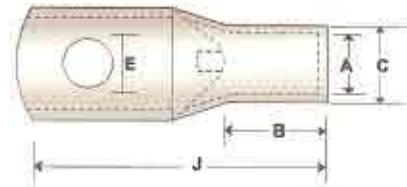

CABLE MM <sup>2</sup>	Stud Hole E	A	C	B	J	CAT. NO.
35	M10	8.0	10.0	17.0	40.0	CELD 35-10
50	M10	9.2	11.2	20.0	49.0	CELD 50-10
70	M12	11.6	13.8	20.0	58.0	CELD 70-12
95	M12	12.8	15.6	22.0	60.0	CELD 95-12
120	M12	14.8	17.8	25.5	65.5	CELD 120-12
150	M12	16.0	19.6	29.0	73.0	CELD 150-12
185	M16	18.0	22.0	34.5	86.5	CELD 185-16
240	M16	22.0	26.0	41.0	102.0	CELD 240-16
300	M16	24.0	28.7	43.5	107.5	CELD 300-16
400	M16	28.0	33.2	47.0	119.0	CELD 400-16
500	M20	30.0	36.0	54.0	126.0	CELD 500-20
630	M20	35.0	41.5	63.0	145.0	CELD 630-20
800	-	39.0	46.3	80.0	170.0	CELD 800
1000	-	43.0	53.8	100.0	205.0	CELD1000